

# DH-IPC-HDBW5541R1-AS-PV

## 5MP Fixed-focal Dome WizMind Network Camera



**WizMind**

Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

### Series Overview

With starlight solution and deep learning algorithm, Dahua WizMind 5 Series network camera has various intelligent functions, including face capture, perimeter protection and people counting, which greatly improve the accuracy of video analysis. The series camera supports dust-proof function, waterproof function and vandal-proof function, complying with the standards of IP67 and IK10 (Supported by some select models).

### Functions

#### Smart Dual Illuminators

Dahua Smart Dual Illuminators technology adopts deep learning algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.

#### Face Detection

Dahua Face Detection technology can detect the face in the image. With deep learning algorithm, the technology supports detecting, tracking, capturing and selecting the best face image, and then outputs face snapshot.

#### Perimeter Protection

With deep learning algorithm, Dahua Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion, fast moving, parking detection, loitering detection and gathering detection) are largely reduced.

- 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition.
- Outputs max. 5MP (2592 × 1944) @20 fps, and supports 4MP (2688 × 1520) @25/30 fps.
- Built-in high-efficiency warm light and IR LED, and Max. IR distance: 50 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Sound and light alarm linkage. When the alarm is triggered, the sound and light will be linked.
- Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker, support two-way talk.
- 12V DC/PoE power supply.
- IP67, IK10 protection.
- SMD 3.0.



#### People Counting

With deep learning algorithm, Dahua People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/daily reports to meet your requirements.

#### Siren and Light Active Deterrence

Dahua siren and light active deterrence network camera supports the light alarm and voice alarm when perimeter event occurs, to realize the deterrence and effective intervention. The camera is built in multiple voices for selection, and supports customized voice importing.

#### One-tap Disarming

Dahua One-tap Disarming function, which is convenient and easy for operation, is the switch for event linkage. Customers can close and recover event linkage through mobile App, which meets multi-scenarios needs.

#### Cyber Security

Dahua network camera is equipped with a series of key security technologies, such as security authentication and authorization, access control, trusted protection, encrypted transmission, and encrypted storage, which improve its security defense and data protection, and prevent malicious programs from invading the device.

**Protection (IP67, IK10, wide voltage)**

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 cm (Impact energy is 20J).

Wide voltage: The camera allows ±30% input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

**Technical Specification**

**Camera**

|                            |   |
|----------------------------|---|
| Image Sensor               | 1/2.7"5Megapixel progressive CMOS   |
| Max. Resolution            | 2592 (H) × 1944 (V)   |
| ROM                        | 128 M   |
| RAM                        | 512 M   |
| Scanning System            | Progressive   |
| Electronic Shutter Speed   | Auto/Manual 1/3 s–1/100,000 s   |
| Min. Illumination          | 0.005 Lux@F1.6 (Color, 30 IRE)<br>0.0005 Lux@F1.6 (B/W, 30 IRE)<br>0 Lux (Illuminator on) |
| S/N Ratio                  | >56 dB  |
| Illumination Distance      | 50 m (164.0 ft)   |
| Illuminator On/Off Control | Auto/Manual   |
| Illuminator Number         | 2 (IR LED); 1 (Warm light)  |
| Pan/Tilt/Rotation Range    | Pan: 0°–355°<br>Tilt: 0°–80°<br>Rotation: 0°–355°   |

**Lens**

|                      |  |
|----------------------|--|
| Lens Type            | Fixed-focal  |
| Mount Type           | M12  |
| Focal Length         | 2.8 mm; 3.6 mm; 6 mm   |
| Max. Aperture        | 2.8 mm: F1.6<br>3.6 mm: F1.6<br>6 mm: F1.6   |
| Field of View        | 2.8 mm: Horizontal 98° × Vertical 71° × Diagonal 129°<br>3.6 mm: Horizontal 80° × Vertical 58° × Diagonal 107°<br>6 mm: Horizontal 50° × Vertical 37° × Diagonal 64° |
| Iris Type            | Fixed  |
| Close Focus Distance | 2.8 mm: 0.9 m (3.0 ft)<br>3.6 mm: 1.6 m (5.2 ft)<br>6 mm: 3.2 m (10.5 ft)  |

| DORI Distance | Lens  | Detect             | Observe           | Recognize        | Identify         |
|---------------|-------|--------------------|-------------------|------------------|------------------|
|               | 2.8mm | 56.0 m (183.7 ft)  | 22.4 m (73.5 ft)  | 11.2 m (36.7 ft) | 5.6 m (18.4 ft)  |
|               | 3.6mm | 80.0 m (262.5 ft)  | 32.0 m (105.0 ft) | 16.0 m (52.5 ft) | 8.0 m (26.2 ft)  |
|               | 6mm   | 120.0 m (393.7 ft) | 48.0 m (157.5 ft) | 24.0 m (78.7 ft) | 12.0 m (39.4 ft) |

**Smart event**

|     |                                  |
|-----|----------------------------------|
| IVS | Abandoned object; missing object |
|-----|----------------------------------|

|          |     |
|----------|-----|
| Heat Map | Yes |
|----------|-----|

**Professional, intelligent**

|                            |  |
|----------------------------|--|
| IVS (Perimeter Protection) | Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection  |
| Face Detection             | Face detection; track; optimization; snapshot; face enhancement; face exposure; face matting setting; face, single inch photo; three snapshot methods: real-time snapshot, optimization snapshot, quality priority; face angle filter; optimization time setting   |
| People Counting            | Support the counting of enter number, leave number and pass number, and displaying and outputting yearly/ monthly/daily reports Support the counting of number in area, and 4 rules configuration Count number of people or stay time and link alarm Support queue management, and 4 rules configuration. Count number of people or stay time and link alarm |
| Intelligent Search         | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos.   |

**Video**

|                             |   |
|-----------------------------|---|
| Video Compression           | H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)  |
| Smart Codec                 | Smart H.265+/Smart H.264+   |
| Video Frame Rate            | Main stream: 2592 × 1944@(1-20 fps)/2688 × 1520@(1-25/30 fps) /1920 × 1080@(1-50/60 fps)<br>Sub stream: (704 × 576@1-50 fps/704 × 480@1-60 fps)<br>Third stream: (1920 × 1080@1-25/30 fps)<br>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity. |
| Stream Capability           | 3 streams   |
| Resolution                  | 5M (2592 × 1944); 4M (2688 × 1520); 4M (2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)   |
| Bit Rate Control            | CBR/VBR   |
| Video Bit Rate              | H.264: 32 kbps–8192 kbps<br>H.265: 12 kbps–8192 kbps  |
| Day/Night                   | Auto (ICR)/Color/B/W  |
| BLC                         | Yes   |
| HLC                         | Yes   |
| WDR                         | 120 dB  |
| Scene Self-adaptation (SSA) | Yes   |
| White Balance               | Auto/natural/street lamp/outdoor/manual/regional custom   |
| Gain Control                | Auto/Manual   |
| Noise Reduction             | 3D NR   |
| Motion Detection            | OFF/ON (4 areas)  |
| Region of Interest (RoI)    | Yes (4 areas)   |
| Smart Illumination          | Yes   |
| Defog                       | Yes   |
| Image Rotation              | 0°/90°/180°/270° (Support 90°/270° with 4M resolution and lower)  |

|                 |         |
|-----------------|---------|
| Mirror          | Yes     |
| Privacy Masking | 8 areas |

### Audio

|                   |                                    |
|-------------------|------------------------------------|
| Built-in MIC      | Yes                                |
| Audio Compression | PCM; G.711a; G.711Mu; G.726; G.723 |

### Alarm

|             |  |
|-------------|--|
| Alarm Event | No SD card; SD card full; SD card error; service life warning; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; fast moving; abandoned object; missing object; loitering detection; people gathering; parking detection; scene changing; audio detection; voltage detection; defocus detection; external alarm; face detection; people counting in area; stay alarm; people counting; people No. exception detection; safety exception; light alarm; sound alarm (21 built-in sounds and custom voices importing) |
|-------------|--|

### Network

|                     |   |
|---------------------|---|
| Network             | RJ-45 (10/100 Base-T)   |
| SDK and API         | Yes   |
| Cyber Security      | Video encryption; firmware encryption; configuration encryption; Digest; WSSE; account lockout; security logs; IP/MAC filtering; generation and importing of X.509 certification; syslog; HTTPS; 802.1x; trusted boot; trusted execution; trusted upgrade |
| Protocol            | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP; Bonjour   |
| Interoperability    | ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec  |
| User/Host           | 20 (Total bandwidth: 80 M)  |
| Storage             | FTP; SFTP; Micro SD card (support max. 256 G); NAS  |
| Browser             | IE: IE8, IE9, IE11<br>Chrome<br>Firefox   |
| Management Software | Smart PSS; DSS; DMSS  |
| Mobile Phone        | IOS; Android  |

### Certification

|               |  |
|---------------|--|
| Certification | CE-LVD: EN62368-1<br>CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU<br>FCC: 47 CFR FCC Part 15, Subpart B<br>UL/CUL: UL60950-1 CAN/CSA C22.2 No.60950-1-07 |
|---------------|--|

### Port

|              |                             |
|--------------|-----------------------------|
| Audio Input  | 1 channel (RCA port)        |
| Audio Output | 1 channel (RCA port)        |
| Alarm Input  | 1 channel in: 5mA 3V–5V DC  |
| Alarm Output | 1 channel out: 300mA 12V DC |

### Power

|              |                             |
|--------------|-----------------------------|
| Power Supply | 12V DC (±30%)/PoE (802.3af) |
|--------------|-----------------------------|

|                   |   |
|-------------------|---|
| Power Consumption | Basic power consumption: 1.9W (12V DC); 2.5W (PoE)<br>Max. power consumption (WDR + H.265 + IR full intensity + white light + max. speaker volume): 8.9W (12V DC); 9.6W (PoE) |
|-------------------|---|

### Environment

|                      |   |
|----------------------|---|
| Operating Conditions | –40°C to +60°C (–40°F to +140°F)/Less than 95% RH |
| Storage Conditions   | –40°C to +60°C (–40°F to +140°F)                  |
| Protection Grade     | IP67; IK10  |

### Structure

|              |                                 |
|--------------|---------------------------------|
| Casing       | Metal                           |
| Dimensions   | 105 mm × Φ126 mm (4.1" × Φ5.0") |
| Net Weight   | 716.4 g (1.6 lb)                |
| Gross Weight | 929.7 g (2.0 lb)                |

### Ordering Information

| Type                   | Part Number              | Description                                       |
|------------------------|--------------------------|---|
| SMP Camera             | DH-IPC-HDBW5541R1P-AS-PV | 5MP Fixed-focal Dome WizMind Network Camera, PAL  |
|                        | DH-IPC-HDBW5541R1N-AS-PV | 5MP Fixed-focal Dome WizMind Network Camera, NTSC |
|                        | IPC-HDBW5541R1P-AS-PV    | 5MP Fixed-focal Dome WizMind Network Camera, PAL  |
|                        | IPC-HDBW5541R1N-AS-PV    | 5MP Fixed-focal Dome WizMind Network Camera, NTSC |
| Accessories (Optional) | PFA197R                  | Junction Box                                      |
|                        | PFB206W                  | Wall Mount Bracket                                |
|                        | PFA109                   | Mount Adapter                                     |
|                        | PFB220C                  | Ceiling Mount Bracket                             |
|                        | PFA156                   | Pole Mount Bracket                                |
|                        | PFM321D                  | 12V DC 1 A Power Adapter                          |
|                        | PFM900-E                 | Integrated Mount Tester                           |
| TF-P100/256G           | MicroSD Memory Card      |   |

**Accessories**

Optional:



PFA197R  
Junction  
Box



PFB206W  
Wall Mount  
Bracket



PFA109  
Mount  
Adapter



PFB220C  
Ceiling Mount  
Bracket



PFA156  
Pole Mount  
Bracket




PFM321D  
12V DC 1 A  
Power Adapter



PFM900-E  
Integrated  
Mount Tester



TF-P100/256G  
MicroSD  
Memory Card

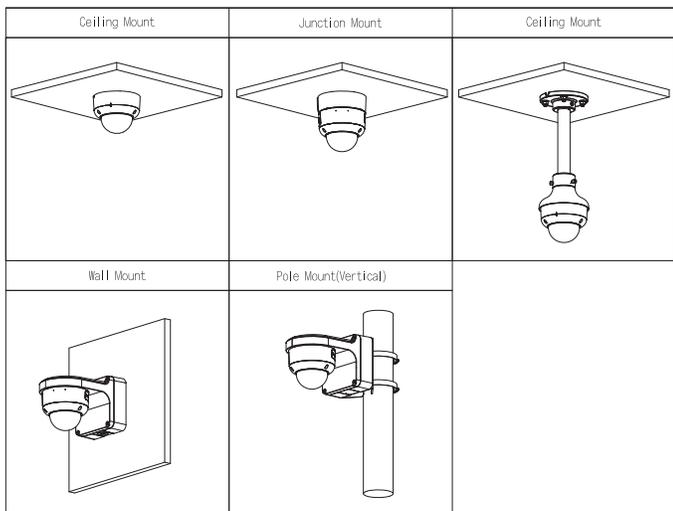

**Dimensions (mm/inch)**

